

- UL Recognized
- Continuous Filament E-Type Glass
- Resists Abrasion, Vibration, And Mechanical Stress
- Easy To Install - Cuts With Scissors
- Stays Flexible In Low Temps



Cut Cleanly
Scissors

Material
Fiberglass

Grade
FHN

Wall Thickness
Refer to Chart

Nominal Size	Diameter	Part #	Wall Thickness	Expansion Range		Standard Spool Put-Ups		Available Colors
				Min.	Max.	Bulk Spool	Shop Spool	
24	0.022"	FHNG.24NT	.005"	0.020"	0.027"	500'	250'	Natural (NT)
22	0.027"	FHNG.22NT	.005"	0.025"	0.032"	500'	250'	Natural (NT)
20	0.034"	FHNG.20NT	.009"	0.032"	0.039"	500'	250'	Natural (NT)
18	0.042"	FHNG.18NT	.011"	0.040"	0.049"	500'	250'	Natural (NT)
17	0.047"	FHNG.17NT	.011"	0.045"	0.054"	500'	250'	Natural (NT)
16	0.053"	FHNG.16NT	.011"	0.051"	0.061"	500'	250'	Natural (NT)
14	0.066"	FHNG.14NT	.011"	0.064"	0.074"	500'	250'	Natural (NT)
13	0.076"	FHNG.13NT	.011"	0.072"	0.082"	500'	250'	Natural (NT)
12	0.085"	FHNG.12NT	.011"	0.081"	0.091"	250'	100'	Natural (NT)
11	0.095"	FHNG.11NT	.011"	0.091"	0.101"	250'	100'	Natural (NT)
10	0.106"	FHNG.10NT	.011"	0.102"	0.112"	250'	100'	Natural (NT)
9	0.118"	FHNG.09NT	.011"	0.114"	0.124"	250'	100'	Natural (NT)
8	0.133"	FHNG.08NT	.011"	0.129"	0.141"	250'	100'	Natural (NT)
7	0.148"	FHNG.07NT	.013"	0.144"	0.158"	250'	100'	Natural (NT)
6	0.166"	FHNG.06NT	.013"	0.152"	0.178"	250'	100'	Natural (NT)
5	0.186"	FHNG.05NT	.013"	0.182"	0.198"	250'	100'	Natural (NT)
4	0.208"	FHNG.04NT	.016"	0.204"	0.224"	250'	100'	Natural (NT)
3	0.234"	FHNG.03NT	.016"	0.229"	0.249"	250'	100'	Natural (NT)
2	0.263"	FHNG.02NT	.016"	0.258"	0.278"	250'	100'	Natural (NT)
1	0.294"	FHNG.01NT	.016"	0.289"	0.311"	100'	50'	Natural (NT)
0	0.330"	FHNG.00NT	.016"	0.325"	0.347"	100'	50'	Natural (NT)
1/4"	0.250"	FHN0.25NT	.010"	0.250"	0.313"	100'	50'	Natural (NT)
5/16"	0.313"	FHN0.31NT	.016"	0.313"	0.333"	100'	50'	Natural (NT)
3/8"	0.375"	FHN0.38NT	.012"	0.375"	0.500"	100'	50'	Natural (NT)
7/16"	0.438"	FHN0.44NT	.018"	0.438"	0.462"	100'	50'	Natural (NT)
1/2"	0.500"	FHN0.50NT	.013"	0.500"	0.625"	100'	50'	Natural (NT)
5/8"	0.625"	FHN0.63NT	.024"	0.625"	0.750"	100'	50'	Natural (NT)
3/4"	0.750"	FHN0.75NT	.024"	0.750"	0.875"	100'	50'	Natural (NT)
1"	1.000"	FHN1.00NT	.024"	1.000"	1.250"	100'	50'	Natural (NT)


Braided Fiberglass Protects up to 1,200°F

INSULTHERM ULTRAFLEX fiberglass sleeving is ideal for the protection of wires and hoses exposed to the heat generated from high performance engine and exhaust components.

The heat treated sleeving cuts with scissors and is compatible with most bonding and saturation systems.

Ultraflex expands slightly, allowing it to slide easily over wires and follow curves and contours without binding.

**"...will withstand extreme heat...
provides the protection needed"**

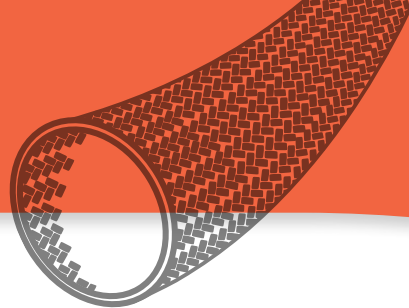

ABRASION  **FLAMMABILITY**

Abrasion Resistance
Medium

Rating _____ VW-1

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
78°F

Humidity
72%

Material Destroyed
1000 Test Cycles

Pre-Test Weight
3,374.0 mg

Post-Test Weight
2,839.3 mg

Test End Loss Of Mass
Point Of Destruction
534.7 mg

 **CHEMICAL
RESISTANCE**


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____ 1
Aliphatic Solvents _____ 1
Chlorinated Solvents _____ 1
Weak Bases _____ 1
Salts _____ 1
Strong Bases _____ 1
Salt Water 0-S-1926 _____ 1
Hydraulic Fluid MIL-H-5606 _____ 1
Lube Oil MIL-L-7808 _____ 1
De-Icing Fluid MIL-A-8243 _____ 1
Strong Acids _____ 2
Strong Oxidants _____ 2
Esters/Ketones _____ 1
UV Light _____ 2
Petroleum _____ 1
Fungus ASTM G-21 _____ 1
Halogen Free _____ Yes
RoHS _____ Yes
SVHC _____ None

Melt Point
ASTM D-2117
2,048°F (1,120°C)

Maximum Continuous
MIL-I-23053
1,202°F (650°C)

Minimum Continuous
-94°F (-70°C)

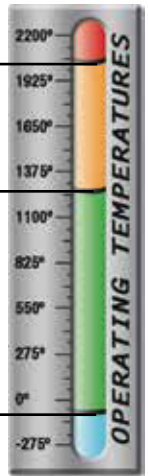

 **PHYSICAL
PROPERTIES**

Monofilament Diameter _____ NA
ASTM D-204
Flammability Rating _____ VW-1
Recommended Cutting _____ Scissor
Colors _____ 1
Wall Thickness _____ .010-.024
Tensile Strength (Yarn) _____
ASTM D-2256 Lbs
Specific Gravity ASTM D-792 ____ 1.0-1.8
Moisture Absorption _____ .01
% ASTM D-570
Hard Vacuum Data _____
ASTM E-595 at 10-5 torr
TML _____ .01
CVCM _____ .00
WVR _____ .00
Smoke D-Max _____
ASTM E-662
Outgassing _____ Low
Oxygen Index _____
ASTM D-2863

www.techflex.com