



- Molten Splash Up to 2200°F
- Strong Hook and Loop Closure
- Wrap Around Fire Protection

Put Ups

Nominal Size	Part #	Wall Thickness ±0.010"	Velcro Width	Bulk Spool	Shop Spool	Available Colors	Lbs/100'
1"	FIW1.00RD	.045"	5/8"	50'	25'	Red	9.16
1 1/2"	FIW1.50RD	.045"	5/8"	50'	25'	Red	12.98
2"	FIW2.00RD	.045"	5/8"	50'	25'	Red	16.80
2 1/2"	FIW2.50RD	.045"	5/8"	50'	25'	Red	20.61
3"	FIW3.00RD	.045"	5/8"	50'	25'	Red	24.43
3 1/2"	FIW3.50RD	.045"	5/8"	50'	25'	Red	28.25
4"	FIW4.00RD	.045"	5/8"	50'	25'	Red	32.07




**Cut Cleanly
Scissors**

Wrappable Hose Protection

FIREFLEX WRAP (FIW) protects and shields important hoses and cables from extreme heat and catastrophic flame outbreaks. It protects continuously to 500°F and will withstand a molten splash at 2200°F.

Its unique hook and loop closure system allows for installation without the need to remove and reconnect fittings and terminations. The reusable closure additionally allows for easy repair, minimizing labor and costly downtime.

Colors Available:
Red (RD)

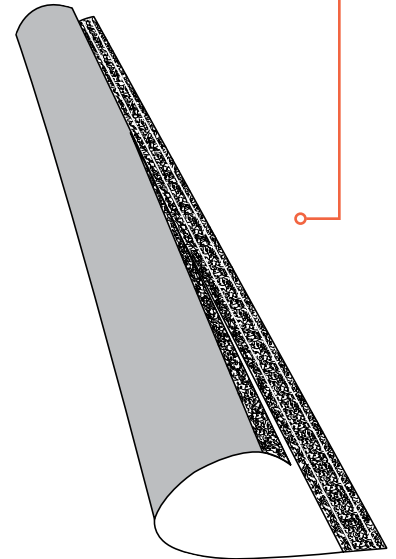


Easy Installation and allows for easy repairs

Material
Silicone Coated Fiberglass

Grade
FF Wrap

Wall Thickness
.045"



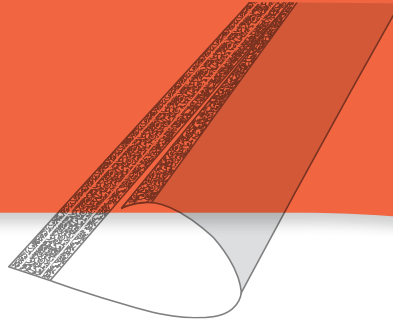

ABRASION **FLAMMABILITY**

Abrasion Resistance
N/A

Rating _____ Non Flammable

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

CHEMICAL RESISTANCE

1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	1
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	2
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	_____

Melt Point
ASTM D-2117
2,048°F (1,120°C)

Maximum Continuous
Mil-I-23053
500°F (260°C)

Minimum Continuous
-65°F (-54°C)



PHYSICAL PROPERTIES

Monofilament Diameter _____ NA
ASTM D-204
Flammability Rating ___ Non Flammable
Recommended Cutting _____ Scissor
Colors _____ 1
Wall Thickness _____ .045
Tensile Strength (Yarn) _____
ASTM D-2256 Lbs
Specific Gravity ASTM D-792 _____ NA

www.techflex.com