



- Wire Meets ASTM-B 33
- Complies with CID A-A-59569
- Point-to-Point Ground Path
- Ideal for Retrofit Applications

Put-Ups

Nominal Size	Part #	Bulk Spool	Shop Spool	Available Colors	Lbs/100'
1/8"	MFN0.13SV	250'	100'	Silver	0.70
3/16"	MFN0.19SV	250'	100'	Silver	1.10
1/4"	MFN0.25SV	250'	100'	Silver	2.00
*3/8"	MFN0.38SV	250'	100'	Silver	2.40
5/8"	MFN0.63SV	100'	50'	Silver	3.60
3/4"	MFN0.75SV	100'	50'	Silver	7.70
*1"	MFN1.00SV	100'	50'	Silver	7.90
1 3/8"	MFN1.38SV	100'	50'	Silver	12.00
1 1/2"	MFN1.50SV	100'	50'	Silver	18.20
*2"	MFN2.00SV	100'	50'	Silver	46.10
*3"	MFN3.00SV	50'	25'	Silver	77.70

*Not on Spec - CID A-A-59569 (formerly Mil Spec QQB-575)



Cut Cleanly
Scissors

Tinned Copper Sleeve - Flat Construction

Like the Tubular construction of our Flexo Tinned Copper, Tinned Copper Flat (MFN) provides excellent shielding efficiency and easy radial termination. Both durable and flexible, it can be used to create a low resistance point-to-point ground strap.

The braid is also an ideal solution to providing additional shielding to cables in retrofit applications.


Colors Available:
Silver (SV)

Material	Tinned Copper Flat
Grade	MFN
Wire Thickness	.005 - .010




800.323.5140 • 973.300.9242 • fax: 973.300.9409
104 Demarest Road • Sparta, NJ 07871



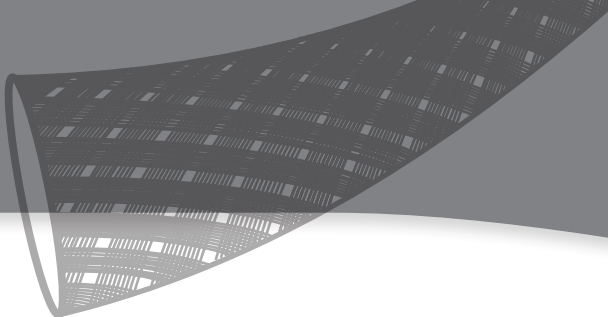

Melt Point
ASTM D-2117
Copper 1,981°F (1,083°C)
Tin 450°F (232°C)

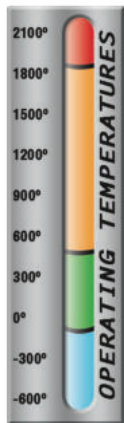

Nominal Size	Part #	AWG of Ends	Carriers	Wires Per Carrier	Current Capacity Amps
1/8"	MFN0.13SV	36	24	3	16
3/16"	MFN0.19SV	36	24	5	25
1/4"	MFN0.25SV	36	24	10	40
*3/8"	MFN0.38SV	36	48	6	40
5/8"	MFN0.63SV	36	48	8	53
3/4"	MFN0.75SV	36	48	18	88
*1"	MFN1.00SV	36	48	18	85
1 3/8"	MFN1.38SV	36	48	7	100
1 1/2"	MFN1.50SV	36	48	11	145
*2"	MFN2.00SV	36	48	28	255
*3"	MFN3.00SV	36	48	47	390

*Not on Spec - CID A-A-59569 (formerly Mil Spec QQB-575)

CHEMICAL RESISTANCE

- 1=No Effect
- 2=Little Effect
- 3=Affected
- 4=More Affected
- 5=Severely Affected

Aromatic Solvents	1
Aliphatic Solvents	1
Chlorinated Solvents	1
Weak Bases	1
Salts	1
Strong Bases	2
Salt Water 0-S-1926	1
Hydraulic Fluid MIL-H-5606	1
Lube Oil MIL-L-7808	1
De-Icing Fluid MIL-A-8243	1
Strong Acids	5
Strong Oxidants	5
Esters/Ketones	1
UV Light	2
Petroleum	2
Fungus ASTM G-21	2
Halogen Free	Yes
RoHS	Yes

PHYSICAL PROPERTIES

Monofilament Diameter	.005 - .010
ASTM D-204	
Flammability Rating	Non Flammable
Recommended Cutting	Shears
Colors	1
Wall Thickness	NA
Specific Gravity ASTM D-792	8.9
Moisture Absorption	NA
% ASTM D-570	

FLAMMABILITY

Rating Non Flammable

2019 Techflex, Inc. - Any unauthorized reproduction, in whole or part, in any medium whatsoever, without the express written permission of Techflex, Inc. is strictly forbidden.

Techflex product names and logos are registered trademarks of Techflex, Inc., unless otherwise attributed. The contents and illustrations contained herein are believed to be reliable. Techflex makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Techflex's only obligations are those in standard terms of sale for these products and Techflex will not be liable for any consequential or other damages arising due to misuse of these products or typographical errors or omissions. Users should make their own evaluation to determine the suitability of these products for their unique and specific applications.