

- High Temperature Resistance
- Easy To Install
- Resists Gasoline And Engine Chemicals
- Great Appearance

**Put-Ups**

Widths	Part #	Wall Thickness	Bulk Spool 1	Bulk Spool 2	Bulk Spool 3	Bulk Spool 4	Available Colors	Lbs/100'
1"	VWN1.00BA	1/16"	100'	50'	25'	15'	Basalt	1.70
2"	VWN2.00BA	1/16"	100'	50'	25'	15'	Basalt	3.20



**Cut Cleanly  
Scissors**

**Material**

**Basalt Fiber**

**Grade**

**VWN**

**Wall Thickness**

**.0625"**


## Woven Volcanic Rock Tape Withstands Heat Up To 1,300°F

VOLCANO WRAP (VW) is made from continuous filament basalt fiber and is engineered for protection from temperatures 1,300°F. When wrapped around exhaust pipes, the unique construction creates attractive and durable finished product.

Volcano Wrap is 25% stronger and provides a 300°F increase in temperature protection over fiberglass wrap. The product is very rugged, and will not exhibit any vibration damage over long period of use.

The volcanic rock fiber wrap is easy to install and will provide years of protection and good looks.

■ **Colors Available:**  
Basalt (BA)

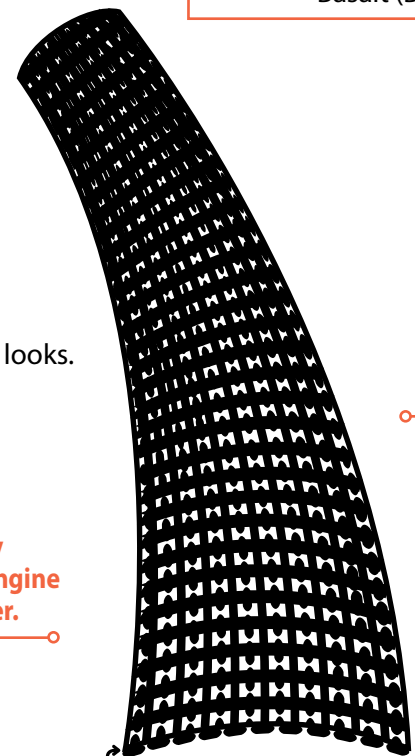

Nominal Size

■ **Volcano Wrap helps redirect the heat every race or every day in production, keeping engine areas cooler and performance results better.**

## **ABRASION** **FLAMMABILITY**

**Abrasion Resistance**  
**Low**

Rating \_\_\_\_\_ Non Flammable

**Abrasion Test Machine**  
**Taber 5150**

**Abrasion Test Wheel**  
**Calibrase H-18**

**Abrasion Test Load**  
**500g**

**Material Destroyed-  
Braid Worn Through in  
Both Directions**  
**203 Test Cycles**


## **CHEMICAL RESISTANCE**

1=No Effect      4=More Affected  
2=Little Effect    5=Severely Affected  
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	1
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	2
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	2
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

**Melt Point**  
ASTM D-2117  
**2,642°F (1,450°C)**

**Maximum Continuous**  
Mil-I-23053  
**1,292°F (700°C)**

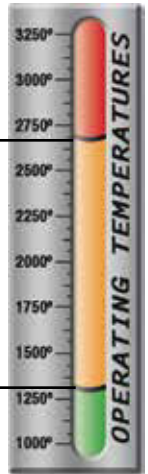

## **PHYSICAL PROPERTIES**

Monofilament Diameter \_\_\_\_\_ NA  
ASTM D-204  
Flammability Rating \_\_\_ Non Flammable  
Recommended Cutting \_\_\_\_\_ Scissor  
Colors \_\_\_\_\_ 1  
Wall Thickness \_\_\_\_\_ .0625